

Performance Bulletin

YPB#: PB_SSW_3301WA_t_F250TXR_5-23-06_OWA

Test Date: 5/23/06



F250TXR/LF250TXR

Seaswirl 3301 Walkaround

Length	33' 5"
Beam	11'
Dry Weight (published)	10,500 lbs.
Max HP	600
Fuel Capacity	347 gals.
Weight as Tested (approximate)	13,906 lbs.

Yamaha F250TXR/LF250TXR

Horsepower	250
Fuel Induction	Electronic Fuel Injection
Displacement	204.6 cu. in.
Weight	592 lbs.
Gear Ratio	2.00
Mounting Height	#3

Propeller

Series	Saltwater Series II
Diameter/Pitch	15-1/4 x 19
Yamaha Part #	6D0-45970-00-00 6D1-45970-00-00

Test Conditions

Number of People	2
Air Temperature	58° F
Water Temperature	55° F
Elevation	Sea Level
Wind Velocity	5-10 MPH

Comments:

Test weight includes 3/4 tank of fuel, two batteries, safety and test equipment.


Note:

Data may vary due to changes in weather, elevation, options and equipment, load and boat bottom conditions. Fuel data gathered with Yamaha's Command Link® fuel management system. Speed data gathered with GPS receiver.

Performance Data

RPM	MPH	GPH	MPG
1000	5.4	2.5	2.16
1500	7.0	3.8	1.84
2000	8.8	6.0	1.47
2500	10.2	8.8	1.16
3000	12.2	12.4	0.98
3500	17.2	15.6	1.10
4000	28.5	20.5	1.39
4500	33.2	25.7	1.29
5000	37.9	30.8	1.23
5500	42.7	37.8	1.13
6000	45.7	43.6	1.05

Seconds to Plane 8.06

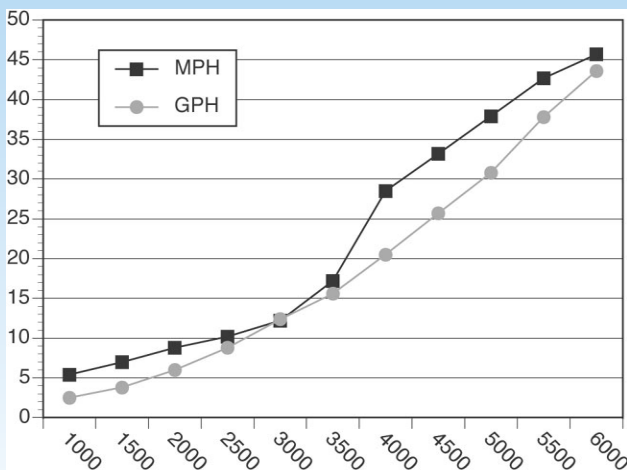

Test performed and certified by Yamaha Application Engineers.

Boat Manufactured By:

Seaswirl • 7th & C Streets • Culver, OR 97734
(541) 546-5011 • www.seaswirl.com

Outboard Manufactured By:

Yamaha Motor Corp., USA • OEM Division, Marine Group
1270 Chastain Road NW • Kennesaw, GA 30144 • (800) 88-YAMAHA
For other Performance Bulletins, visit www.yamaha-motor.com.