

Yamaha Performance Bulletin

YPB#: PB_SSW_2101DC_F250TXR_7-1-08_ODC

Test Date: 7/1/08



Seaswirl 2101 Dual Console

Length	21' 6"
Beam	8' 6"
Dry Weight (Boat Mfr. Published)	3,280 lbs.
Maximum HP	250 hp
Fuel Capacity	105 gals.
Weight as Tested (Approximate)	4,664 lbs.

Seaswirl

Boat Manufactured By:

Seaswirl • 901 Martin Downs Boulevard • Panama City, FL 34990
(320) 631-0042 • www.seaswirl.com

Yamaha F250TXR

Horsepower	250
Displacement	204.6 cu. in.
Weight (Catalog Published)	604 lbs.
Gear Ratio	2.00

Engine Mounting Height

Mounting Hole Position	#1
------------------------	----

Propeller

Series	Saltwater Series II
Diameter/Pitch	15-1/4 x 19
Yamaha Part #	6D0-45970-00-00
Propeller Material	Stainless Steel

Test Conditions

Number of People	2
Air / Water Temperature (Fahrenheit)	79° / 69°
Elevation	1,000'
Wind Velocity	10-15 MPH

Comments: Test weight includes 1/2 tank of fuel, one battery, safety and test equipment. Fuel consumption data gathered with Yamaha Command Link® fuel management system. Zero-to-30 speed data gathered with Yamaha speedometer. Other speed data gathered with GPS receiver.


Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Yamaha reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice.

Performance Data

RPM	MPH	GPH	MPG
1000	4.8	1.2	4.00
1500	6.9	1.8	3.83
2000	8.0	2.9	2.76
2500	9.1	4.2	2.17
3000	14.7	5.5	2.67
3500	27.4	6.7	4.09
4000	32.3	8.3	3.89
4500	36.2	11.0	3.29
5000	40.0	14.3	2.80
5500	43.7	17.9	2.44
6000	49.1	20.2	2.43

Seconds 0-30 MPH

8.09

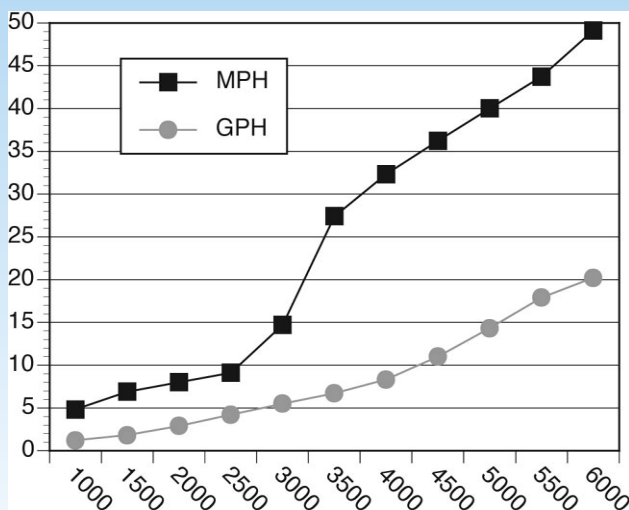

Test performed and verified by Yamaha Application Engineers.

For More Information:

Yamaha Motor Corp., USA • OEM Division, Marine Group
1270 Chastain Road NW • Kennesaw, GA 30144 • (800) 88-YAMAHA
For other Performance Bulletins, visit www.yamaha-motor.com.